

WM91

Pork & Pickle[™]

BASS OVERDRIVE & FUZZ

GET LOW, DOWN, AND DIRTY!

Now in a Way Huge Smalls[™] housing, the Pork & Pickle Bass Overdrive & Fuzz serves up a perfectly balanced diet of gnarly tones for bass players who like to get down and dirty. The first ever bass pedal from Way Huge, this delectable dish combines the warm, soft-clipping tones of the Pork Loin[™] Overdrive and the rich, fatty tones of the Russian-Pickle[™] Fuzz in a single package.

External Controls




- 1** CLEAN BLEND knob mixes clean signal with OD or fuzz
- 2** VOLUME knob sets output level
- 3** OD/FUZZ switch toggles OD & fuzz circuits
- 4** DRIVE knob sets overdrive or fuzz intensity
- 5** CLEAN TONE knob adjusts clean signal from mellow to bright
- 6** TONE knob cuts highs of OD signal or shapes EQ of fuzz signal
- 7** FOOTSWITCH toggles the effect on/bypass (blue LED indicates effect is on)

POWER

The Pork & Pickle™ Bass Overdrive & Fuzz is powered by a single 9-volt battery, a 9-volt AC adapter such as the Dunlop ECB003, or the DC Brick™ and Iso-Brick™ power supplies. The power input is a 5.5mm x 2.1mm jack with the positive voltage on the outer sleeve. Using an external power supply will disconnect the battery. Disconnect the input jack to preserve battery life when not in use.

Internal Controls

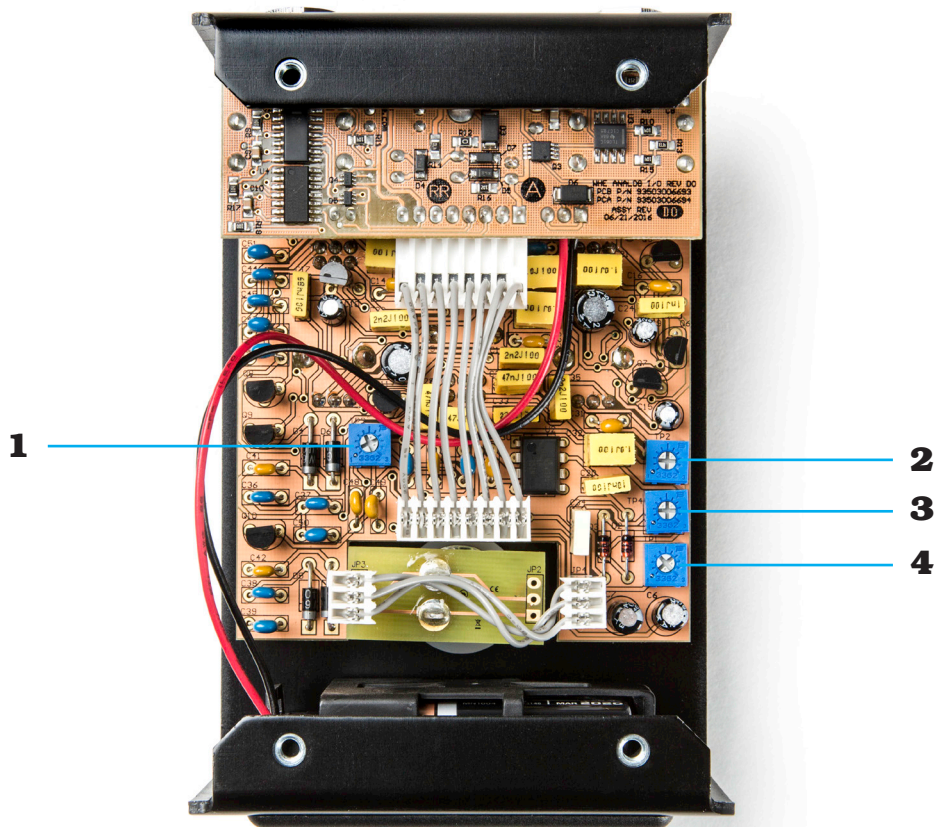

- 1** FUZZ OUTPUT trimpot adjusts mix of fuzz signal
- 2** CURVE trimpot fine-tunes corner frequencies of OD signal
- 3** PRESENCE trimpot tweaks high end of OD signal
- 4** OVERDRIVE OUTPUT trimpot adjusts mix of OD signal

Specifications

Input Impedance	> 1M Ω
Output Impedance	< 25 k Ω
Signal to Noise Ratio	(all controls @ MID position): 90 dBV 'A' Weighted
Noise Floor*	-96 dBV
Bypass	True Bypass
Current Draw	18.5 mA @ 9VDC
Power Supply	9 Volts DC

All measurements made with controls at center. Noise measurements are A-weighted.