

Hot Spot

Frequency response 20-20.000 Hz


Universal Soundboard Transducer

Drum Trigger

This versatile transducer works with a huge variety of instruments. Refer to the diagrams (above) for recommended locations. To find the "sweet spot (the best mounting location) simply duct tape the pickup to different spots and listen for the best result.

For final installation, use the supplied double-sided adhesive film tape between the instrument and golden side of pickup. If additional protection is desired, tape an additional piece of duct tape over the pickup.

Removal:
DO NOT PULL OFF BY THE WIRE! It may damage the pickup and will void the warranty. Use a sharp knife or razor blade, slide it under pickup, and gently lift off.

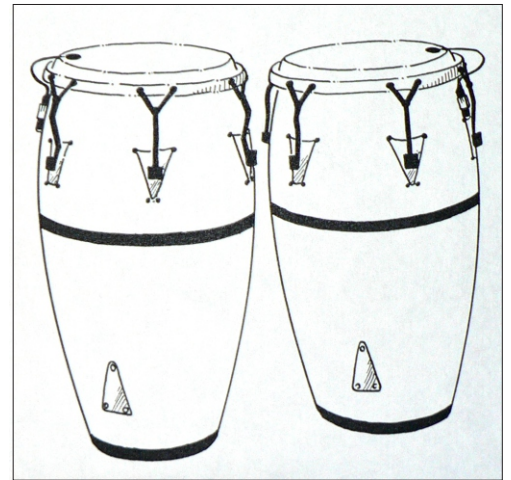

Drum Trigger:
 Use both the double stick tape and a piece of duct tape over the pickup. Mount near a damper if possible. You may also tape the cable to the rim to avoid mechanical vibration. Do not hit pickup directly.

